



# Water Separators

Models | A30006WS to A31500WS

Flow Rates 6 SCFM (10 Nm<sup>3</sup>/hr) to 1500 SCFM (2550 Nm<sup>3</sup>/hr)

**Integrating into Walker Filtration's compressed air filtration range, the Alpha Water Separator combines proven Alpha centrifugal technology with a new forward thinking housing design to deliver market leading water removal efficiencies – eliminating up to 99% bulk water with continuously low differential pressure.**

The custom engineered centrifugal module features unique vanes to eliminate points of low efficiency, and a vortex arrestor to stop re-entrainment - ensuring minimal operating pressure loss and maintaining excellent liquid removal, even at low velocities.

No replacement components are required, making Walker Filtration's Water Separators a viable and cost effective solution for removing bulk water from compressed air.

**Removes up to 99% of bulk water when tested in accordance with ISO 12500-4**



#### Unique Centrifugal Module

Removes up to 99% of bulk water even at low velocities



#### Externally Accessible Drain Valve

Eliminates the need to access inside the water separator housing when servicing the drain



#### Modular Construction

Low cost connecting kits and new filter head design enables easy close coupling assembly

- **Energy Saving** Water Separators operate with consistently low differential pressure reducing both energy consumption and operating costs
- **Flexible Installation** Modular design and accessible fixings enable simple close coupling assembly
- **Cost Effective** No replacement components required
- **Externally Accessible Drain Valve** Drain valve can be removed externally on larger models
- **Product Safety in Mind** Guaranteed safe housing closure with rotational safety stop
- **Corrosion Protection** Internal and external electrophoretic painting followed by a tough exterior polyester powder coating



For further information please call: +1 814 836 2900



# Technical Specification

Filter model	Pipe size inches	Inlet flow rate*		Dimensions inches (mm)				Weight	
		SCFM	Nm <sup>3</sup> /hr	A	B	C	D	lbs	kg
A30006WS	1/8	6	10	1.97 (50)	0.67 (17)	6.18 (157)	2.36 (60)	0.6	0.3
A30015WS	1/4	15	25	1.97 (50)	0.67 (17)	6.18 (157)	2.36 (60)	0.6	0.3
A30025WS	1/4	25	42	2.76 (70)	0.91 (23)	9.09 (231)	2.76 (70)	1.3	0.6
A30032WS	3/8	35	54	2.76 (70)	0.91 (23)	9.09 (231)	2.76 (70)	1.3	0.6
A30050WS	1/2	50	85	2.76 (70)	0.91 (23)	9.09 (231)	2.76 (70)	1.3	0.6
A30070WS	1/2	70	119	5.00 (127)	1.26 (32)	11.22 (285)	3.15 (80)	3.7	1.7
A30125WS	3/4	125	212	5.00 (127)	1.26 (32)	14.57 (370)	3.15 (80)	3.7	1.7
A30175WS	1	175	297	5.00 (127)	1.26 (32)	14.57 (370)	3.15 (80)	3.7	1.7
A30280WS	1 1/4	280	476	5.51 (140)	1.61 (41)	18.74 (476)	3.35 (85)	6.6	3.0
A30320WS	1 1/2	320	544	5.51 (140)	1.61 (41)	18.74 (476)	3.35 (85)	6.6	3.0
A30400WS	1 1/2	400	680	6.69 (170)	2.08 (53)	20.00 (508)	3.94 (100)	10.8	4.9
A30700WS	2	700	1189	6.69 (170)	2.08 (53)	27.87 (708)	3.94 (100)	10.8	4.9
A30850WS	2 1/2	850	1444	8.66 (220)	2.75 (70)	16.54 (420)	3.94 (100)	17.6	8.0
A31500WS	3	1500	2550	8.66 (220)	2.75 (70)	16.54 (420)	3.94 (100)	17.6	8.0

\*Rated flow at 100 psig (7 barg), reference conditions at 14.7 psi(a) (1.014 bar (a)) 68°F (20°C)

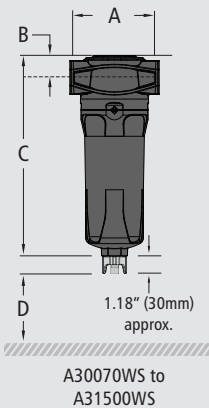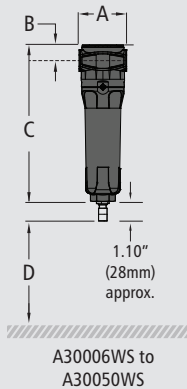

Grade	WS	
Minimum recommended operating temperature - automatic drain	34°F	1°C
Maximum recommended operating temperature - automatic drain	176°F	80°C
Maximum working pressure - automatic drain	232 psig	16 barg
Minimum recommended operating temperature - manual drain	34°F	1°C
Maximum recommended operating temperature - manual drain	248°F	120°C
Maximum working pressure - manual drain	300 psig	20.7 barg
Typical pressure loss at rated flow	0.8 psi	55 mbar

## Technical Notes

- Water Separators are fitted as standard with normally open float operated automatic drain valves, ADVS16 on models A30006WS to A30050WS and ADVSE16 on models A30070WS to A31500WS. Normally closed operated automatic drain valves (ADVSE16C) are available for low range flow applications (2.5 SCFM, 4.2 Nm<sup>3</sup>/hr). 300 psig (20.7 barg) range at 248°F (120°C) is available when supplied with a manual drain valve (MDV25 on models A30006WS to A30050WS and MDVE25 on models A30070WS to A31500WS). Standard filters can operate at 232 psig (16 barg) at 176°F (80°C).
- Connecting kits are required to connect Water Separators to models A30006 to A31500 - see price guide.
- Wall mounting brackets are available for all models - see price guide.
- Standard threaded connections are NPT to ANSI/ASME B1.20.1. RP (BSP Parallel) to ISO 7-1 and RC (BSP Taper) to ISO 7-1 are also available upon request.

CRN

